


This document describes the Specification of the Ni-Cd SC2000HD

单体电池规格 Specifications of single cell

标称电压 Nominal voltage		1.2V
标称容量 Nominal Capacity		2000mAh
尺寸 Dimensions		mm
	直径 Diameter	22±0.04
	高度 Height	42.1±0.4
大约重量 Weight(Approximately)		克 gram 46.7
内阻 Internal Impedance At 1000 Hz		12mΩ (充电后 After Charge)
充电 Charge	标准 Standard	200mA(0.1CA)×16h
	快速 Rapid	600mA(0.3CA)×4h
放电 Discharge	持续 continuous	Max 20A(10C)
	瞬间 momentary	Max 30A
环境温度 Ambient temperature		℃
	充电 Charge	标准 standard 0℃ to 35℃
		快速 Rapid 10℃ to 35℃
	放电 Discharge	-30℃ to 60℃
	贮藏 Storage	-30℃ to 35℃

单颗电池尺寸包括 PVC (Dimensions with tube)

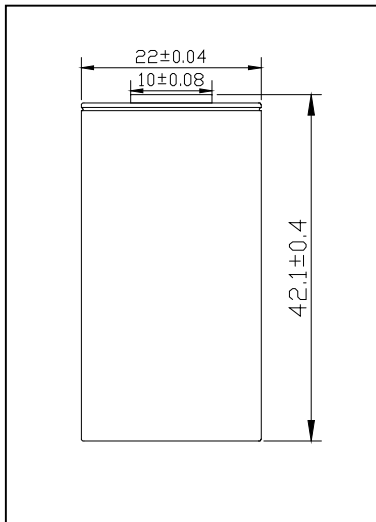

备注 Note:

- 标称容量是指 20℃ 时 0.2CA 放电容量
Nominal capacity, rated at 0.2CA 20℃.
- 容量只作为参考
Average capacity, for reference only.
- 重量和内阻也仅作为参考
Weight and internal impedance are For reference only.
- 寿命测试依照 IEC 标准
Standard according as IEC of test cycle life.

典型特征 Typical characteristics

